




SPECIFICATIONS

- Door thickness: 1-3/8" to 2"
- Backset: 2-3/4" standard. 2-3/8" backset drive-in latch available
- Cylinder: 6-pin solid brass "C" keyway standard
- Deadbolt latch UL listed, 1" throw

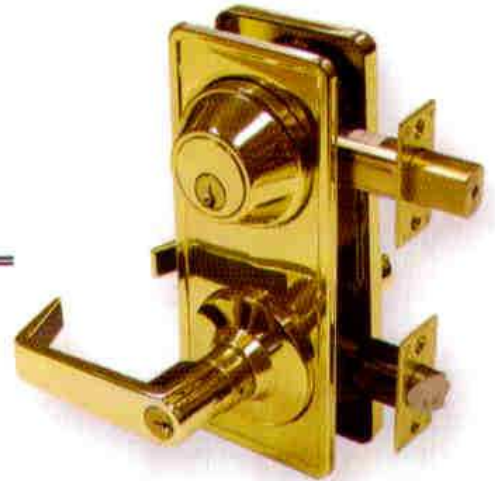

-
- Door thickness: 1-3/8" to 1-3/4"
 - Backset: 2-3/4" standard. Latch for 2-3/8" backset available. UL listed.
 - Cylinder: 6-pin solid brass "C" keyway standard
 - Deadbolt latch UL listed, 1" throw
 - Latch Bolt: UL listed, chrome plated 1/2" throw
 - Center-to-center: 4"



STANDARD CORE

- Non-handed Clutch system lever
- Door thickness: 1-3/8" to 2"
- Backset: 2-3/4" standard. 2-3/8" backset latch available
- Latch Bolt: UL listed, chrome plated 1/2" throw
- Strike: ANSI 1-1/4" x 4-7/8" x 1-1/4" lip-to-center
- Cylinder: 6-pin solid brass "C" keyway standard
- Removable through-bolts.





INTERCHANGEABLE CORE (IC)

- Locks are prepped for a small format IC core.
- Compatible with Schlage, Best, Falcon, and Arrow cores.
- Locks are supplied less core.
- Other specs. same as above.

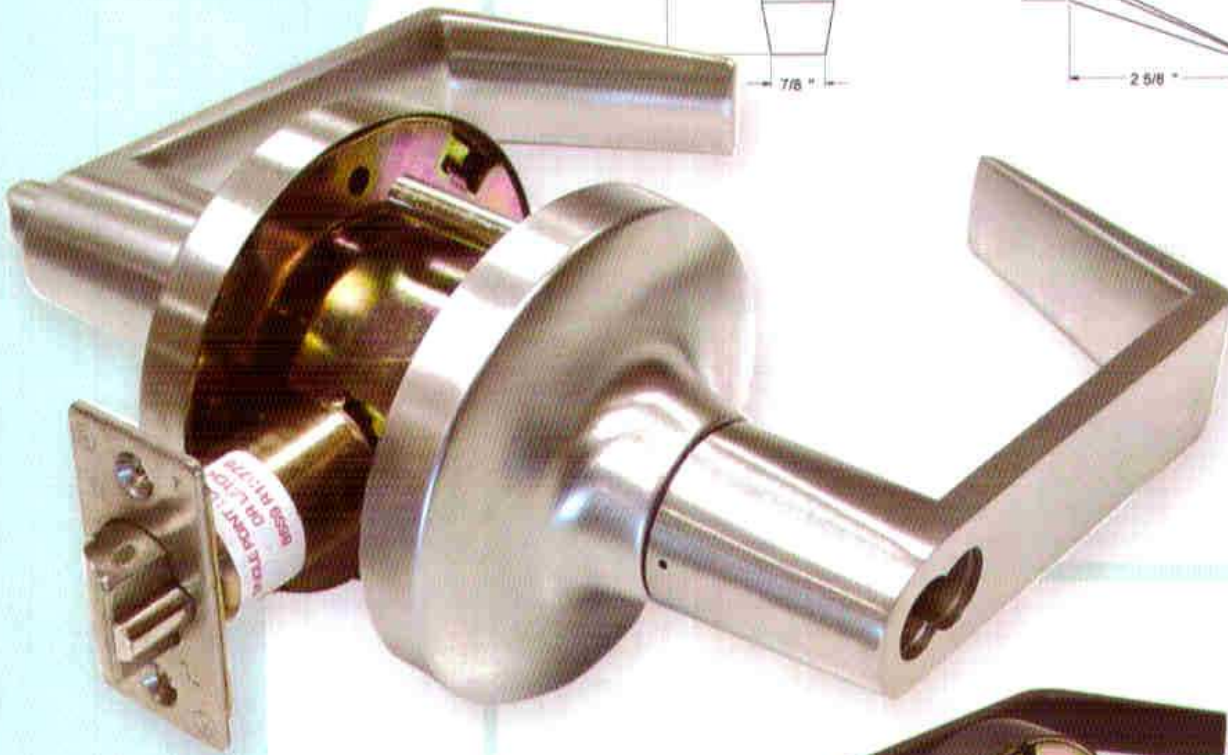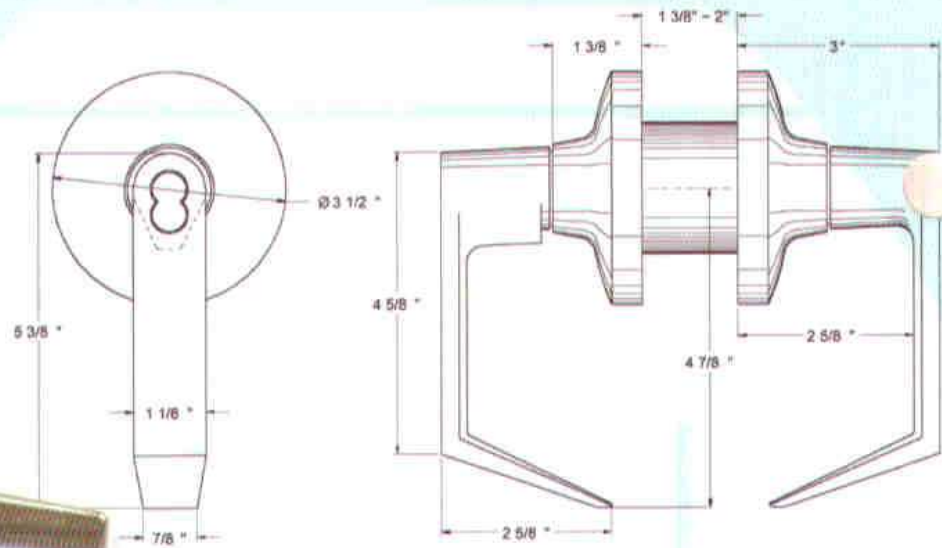

The Doral Lock Professional Series brings the highest quality engineering to its line of Grade 1 & 2 commercial locks, door closers and bath hardware.

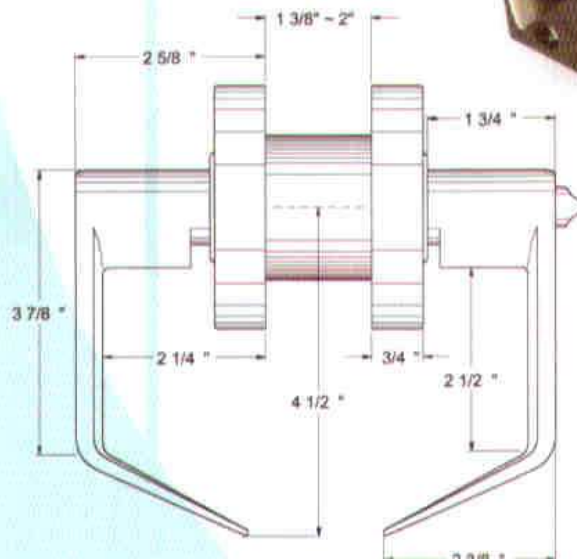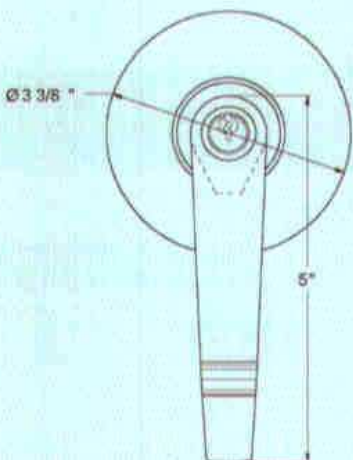

Doral Lock

PROFESSIONAL SERIES

commercial grade door hardware

Specifications:

Housing

Cold rolled steel and zinc dichromate finish for rust resistance. Door prep is a 2-1/8" bore, with 1/8" holes for through-bolts at 12 o'clock and 6 o'clock positions. Through-bolts fixed for Grade 1 and removable for Grade 2.

Latch UL Approved

2-3/4" backset latch included has 1/2" throw. 2-3/8" backset latch sold separately. Drive-in latch models also sold for Grade 2. Housing is steel-zinc dichromate finish for rust resistance. 7/8" diameter bore is required.

Latch Front

Solid Brass/Stainless Steel 2-1/4" x 1-1/8" standard. 2-1/4" x 1" latches sold separately

Strikes

UL Listed ANSI 1-1/4" x 4-7/8" strike standard. with 1-1/4" lip to center dimension. 1-1/4" x 2-3/4" T-strikes sold separately with 1-1/4" lip-to-center dimension.

Handing Universal

Door Thickness Range 1-3/8" to 2"

Cylinder

Solid brass 6-pin, Schlage C compatible keyway. Pinned 6 with two 6-pin keys standard.

Interchangeable Core (IC)

Locks are prepped for a small format IC core, compatible with Schlage, Best, Falcon, and Arrow cores. Locks are supplied less core.

Trim

Grade 1 - fixed throughbolts
Grade 2 - removable throughbolts

Available Functions:

Passage Latch

Both levers are always unlocked.

Bath/Bedroom Privacy Lock

Push-button locking. Can be opened from outside with small screwdriver. Turning inside lever or closing door releases button.

Entrance Lock:

Grade 1 & 2 locks have both of the following functions
1. Turn/push-button locking: pushing and turning button locks outside lever requiring use of key until button is manually unlocked.
2. Push-button locking: pushing button locks outside lever until unlocked by key or by turning inside lever.

Classroom Lock

Outside lever locked and unlocked by key. Inside lever always unlocked.

Storeroom Lock

Outside lever fixed. Entrance by key only. Inside lever always unlocked.

Clutch Function

When locked, the lever turns freely without retracting the latch to deter breaking of the mechanism. All Doral Pro commercial door hardware has this added function.

Limited Warranty

5-year mechanical, 1-year finish for Pro Series with exception to normal wear and tear.

Meets ANSI 156.2 Grade 1 & 2 requirements

Doral Pro Series commercial locks and exit devices made in Taiwan

Schematic drawings available by request.

DoralLock

PROFESSIONAL SERIES

commercial grade door hardware



GRADE 1 LOCKS

		LIST PRICE EACH
CL200LM-26D	SINGLE DEADBOLT GR1 W/ 2-3/4" BACKSET US26D	52.00
CL200LM-3	SINGLE DEADBOLT GR1 W/ 2-3/4" BACKSET US3	48.00
CL210LM-26D	DOUBLE DEADBOLT GR1 W/ 2-3/4" BACKSET US26D	66.00
CL210LM-3	DOUBLE DEADBOLT GR1 W/ 2-3/4"BACKSET US3	62.00
<hr/>		
CL500FLC-10B	COMM. ENTRY STANDARD GR1, CLARENDON W/ CYL, US10B	93.00
CL500FLCNC-10B	COMM. ENTRY STANDARD GR1, CLARENDON LESS CYL, US10B	88.00
CL500FLC-26D	COMM. ENTRY STANDARD GR1, CLARENDON W/ CYL, US26D	90.00
CL500FLCNC-26D	COMM. ENTRY STANDARD GR1, CLARENDON LESS CYL, US26D	85.00
CL500FLC-3	COMM. ENTRY STANDARD GR1, CLARENDON W/ CYL, US3	86.00
CL500FLCNC-3	COMM. ENTRY STANDARD GR1, CLARENDON LESS CYL, US3	81.00
CL501FLC-10B	COMM. PASSAGE STANDARD GR1, CLARENDON, US10B	87.00
CL501FLC-26D	COMM. PASSAGE STANDARD GR1, CLARENDON, US26D	85.00
CL501FLC-3	COMM. PASSAGE STANDARD GR1, CLARENDON, US3	80.00
CL502FLC-10B	COMM. PRIVACY STANDARD GR1, CLARENDON, US10B	87.00
CL502FLC-26D	COMM. PRIVACY STANDARD GR1, CLARENDON, US26D	85.00
CL502FLC-3	COMM. PRIVACY STANDARD GR1, CLARENDON, US3	80.00
CL504FLC-10B	COMM. STORE ROOM STANDARD GR1, CLARENDON W/ CYL, US10B	93.00
CL504FLCNC-10B	COMM. STORE ROOM STANDARD GR1, CLARENDON LESS CYL, US10B	88.00
CL504FLC-26D	COMM. STORE ROOM STANDARD GR1, CLARENDON W/ CYL, US26D	90.00
CL504FLCNC-26D	COMM. STORE ROOM STANDARD GR1, CLARENDON LESS CYL, US26D	85.00
CL504FLC-3	COMM. STORE ROOM STANDARD GR1, CLARENDON W/ CYL, US3	86.00
CL504FLCNC-3	COMM. STORE ROOM STANDARD GR1, CLARENDON LESS CYL, US3	81.00
CL509FLC-10B	COMM. CLASSROOM STANDARD GR1, CLARENDON W/ CYL, US10B	102.00
CL509FLCNC-10B	COMM. CLASSROOM STANDARD GR1, CLARENDON LESS CYL, US10B	97.00
CL509FLC-26D	COMM. CLASSROOM STANDARD GR1, CLARENDON W/ CYL, US26D	99.00
CL509FLCNC-26D	COMM. CLASSROOM STANDARD GR1, CLARENDON LESS CYL, US26D	94.00
CL509FLC-3	COMM. CLASSROOM STANDARD GR1, CLARENDON W/ CYL, US3	95.00
CL509FLCNC-3	COMM. CLASSROOM STANDARD GR1, CLARENDON LESS CYL, US10B	90.00
<hr/>		
CL500FRCNC-26D	COMM. ENTRY IC CORE GR1, CLARENDON LESS CYL, US26D	94.00
CL500FRCNC-3	COMM. ENTRY IC CORE GR1, CLARENDON LESS CYL, US3	89.00
CL504FRCNC-26D	COMM. STORE ROOM IC CORE GR1, CLARENDON LESS CYL, US26D	94.00
CL504FRCNC-3	COMM. STORE ROOM IC CORE GR1, CLARENDON LESS CYL, US3	89.00
CL509FRCNC-26D	COMM. CLASS ROOM IC CORE GR1, CLARENDON LESS CYL, US26D	102.00
CL509FRCNC-3	COMM. CLASS ROOM IC CORE GR1, CLARENDON LESS CYL, US3	98.00




SPECIFICATIONS

- Door thickness: 1-3/8" to 2"
- Backset: 2-3/4" standard.
- Latch Bolt: 1-1/8" x 2-1/4" UL listed, 1" throw
- Strike: No lip-square corner 1-1/8" x 2-3/4" with frame reinforcer & dust box
- Cylinder: 6-pin solid brass "C" keyway standard

STANDARD CORE

- Non-handed Clutch system lever
- Door thickness: 1-3/8" to 2"
- Backset: 2-3/4" standard. 2-3/8" backset latch available
- Latch Bolt: UL listed, chrome plated 1/2" throw
- Strike: ANSI 1-1/4" x 4-7/8" x 1-1/4" lip-to-center
- Cylinder: 6-pin solid brass "C" keyway standard

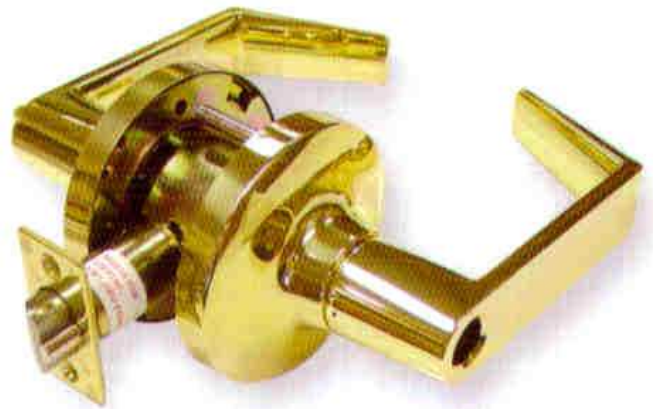

INTERCHANGEABLE CORE (IC)

- Locks are prepped for a small format IC core.
- Compatible with Schlage, Best, Falcon, and Arrow cores.
- Locks are supplied less core.
- Other specs. same as above.

DoralLock

PROFESSIONAL SERIES

commercial grade door hardware



GRADE 2 LOCKS

LIST PRICE
EACH

CL200LA-3	SINGLE DEADBOLT GR2 W/ 2-3/4" BACKSET US3	33.00
CL200LA-32D	SINGLE DEADBOLT GR2 W/ 2-3/4" BACKSET US32D	35.00
CL200LA-10B	SINGLE DEADBOLT GR2 W/ 2-3/4" BACKSET US10B	35.00
CL210LA-3	DOUBLE DEADBOLT GR2 W/ 2-3/4" BACKSET US3	45.00
CL210LA-32D	DOUBLE DEADBOLT GR2 W/ 2-3/4" BACKSET US32D	47.00
CL210LA-10B	DOUBLE DEADBOLT GR2 W/ 2-3/4" BACKSET US10B	47.00

CL300ILC-26D	INTERCON. LOCK GR2, ENTRY W/ CLAREDON LEVER US26D	135.00
CL300ILC-3	INTERCON. LOCK GR2, ENTRY W/ CLAREDON LEVER US3	118.00
CL308ILC-26D	INTERCON. LOCK GR2, PASSAGE W/ CLAREDON LEVER US 26D	126.00
CL308ILC-3	INTERCON. LOCK GR2, PASSAGE W/ CLAREDON LEVER US3	104.00

* Interconnected heavy duty 1-inch deadbolt retracts simultaneously with latchbolt by turning inside lever.

CL500EVC-10B	COMM. ENTRY STANDARD GR2, CLAREDON W/ CYL, US10B	77.00
CL500EVCNC-10B	COMM. ENTRY STANDARD GR2, CLAREDON LESS CYL, US10B	72.00
CL500EVC-26D	COMM. ENTRY STANDARD GR2, CLAREDON W/ CYL, US26D	74.00
CL500EVCNC-26D	COMM. ENTRY STANDARD GR2, CLAREDON LESS CYL, US26D	69.00
CL500EVC-3	COMM. ENTRY STANDARD GR2, CLAREDON W/ CYL, US3	70.00
CL500EVCNC-3	COMM. ENTRY STANDARD GR2, CLAREDON LESS CYL, US3	65.00

CL501EVC-10B	COMM. PASSAGE STANDARD GR2, CLAREDON, US10B	71.00
CL501EVC-26D	COMM. PASSAGE STANDARD GR2, CLAREDON, US26D	69.00
CL501EVC-3	COMM. PASSAGE STANDARD GR2 CLAREDON, US3	64.00
CL502EVC-10B	COMM. PRIVACY STANDARD GR2, CLAREDON, US10B	71.00
CL502EVC-26D	COMM. PRIVACY STANDARD GR2, CLAREDON, US26D	69.00
CL502EVC-3	COMM. PRIVACY STANDARD GR2, CLAREDON, US3	64.00

CL504EVC-10B	COMM. STORE ROOM STANDARD GR2, CLAREDON W/ CYL, US10B	77.00
CL504EVCNC-10B	COMM. STORE ROOM STANDARD GR2, CLAREDON LESS CYL, US10B	72.00
CL504EVC-26D	COMM. STORE ROOM STANDARD GR2, CLAREDON W/ CYL, US26D	74.00
CL504EVCNC-26D	COMM. STORE ROOM STANDARD GR2, CLAREDON LESS CYL, US26D	69.00
CL504EVC-3	COMM. STORE ROOM STANDARD GR2, CLAREDON W/ CYL, US3	70.00
CL504EVCNC-3	COMM. STORE ROOM STANDARD GR2, CLAREDON LESS CYL, US3	65.00

CL509EVC-10B	COMM. CLASS ROOM STANDARD GR2, CLAREDON W/ CYL, US10B	86.00
CL509EVCNC-10B	COMM. CLASS ROOM STANDARD GR2, CLAREDON LESS CYL, US10B	81.00
CL509EVC-26D	COMM. CLASS ROOM STANDARD GR2, CLAREDON W/ CYL, US26D	83.00
CL509EVCNC-26D	COMM. CLASS ROOM STANDARD GR2, CLAREDON LESS CYL, US26D	78.00
CL509EVC-3	COMM. CLASS ROOM STANDARD GR2, CLAREDON W/ CYL, US3	79.00
CL509EVCNC-3	COMM. CLASS ROOM STANDARD GR2, CLAREDON LESS CYL, US3	74.00

CL500ECCNC-26D	COMM. ENTRY IC CORE GR2, CLAREDON LESS CYL, US26D	77.00
CL500ECCNC-3	COMM. ENTRY IC CORE GR2, CLAREDON LESS CYL, US3	73.00
CL504ECCNC-26D	COMM. STORE ROOM IC CORE GR2, CLAREDON LESS CYL, US26D	77.00
CL504ECCNC-3	COMM. STORE ROOM IC CORE GR2, CLAREDON LESS CYL, US3	73.00
CL509ECCNC-26D	COMM. CLASS ROOM IC CORE GR2, CLAREDON LESS CYL, US26D	86.00
CL509ECCNC-3	COMM. CLASS ROOM IC CORE GR2, CLAREDON LESS CYL, US3	82.00